


Serie Protection

SR435PI/SR435PE Nylon Protection Cable Chain with openable covers

Inner height (D) 35 mm

Sideband & Frame construction with large anti-friction single-pin.
Covers are openable from inner radius (SR435PI) or from outer radius (SR435PE).
Vertical separators are available.



Separator

- Unassembled Part.no S4353
- Assembled Part.no S4353MC


Pin

Part.no PG4353

Technical characteristics when self-supported

Speed	10 m/s
Acceleration	50 m/s ²

For higher requirements please consult our technical dept.

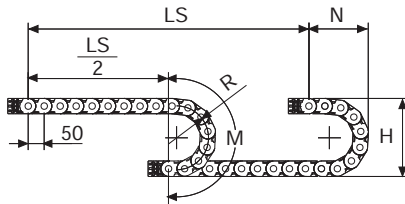

Length of chain (L)
Half travel distance ($\frac{LS}{2}$)
plus length of curve (M)

$$L = \frac{LS}{2} + M$$

A mm	B mm	C mm	D mm	R mm	Weight/m kg	Chain Part Number
60	49	40	35	075-100-125-150-200	1,25	SR435PI(PE)040 □□□*
70	49	50	35	075-100-125-150-200	1,40	SR435PI(PE)050 □□□*
80	49	60	35	075-100-125-150-200	1,45	SR435PI(PE)060 □□□*
96	49	76	35	075-100-125-150-200	1,60	SR435PI(PE)076 □□□*
117	49	97	35	075-100-125-150-200	1,75	SR435PI(PE)097 □□□*
123	49	103	35	075-100-125-150-200	1,90	SR435PI(PE)103 □□□*
145	49	125	35	075-100-125-150-200	2,10	SR435PI(PE)125 □□□*
170	49	150	35	075-100-125-150-200	2,35	SR435PI(PE)150 □□□*

*Complete the code by inserting the value of the radius (R): Ex. SR435PI(PE)040 □□□□

R mm	H mm	N mm	M mm
075	199	155	340
100	249	175	415
125	299	200	495
150	349	230	575
200	449	275	730



